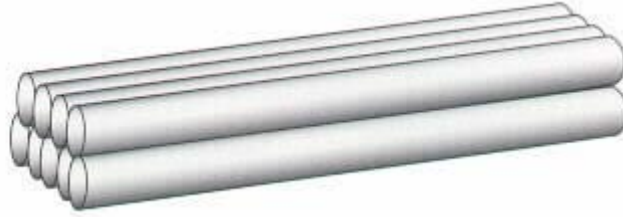



**ASTM A 778**


INSIDE DIA.		GAUGE / JAUGE											
		14		12		11		10		7		3	
DIA. INTÉRIEURE		WALL / MUR		WALL / MUR		WALL / MUR		WALL / MUR		WALL / MUR		WALL / MUR	
INCHES	mm	.078"	2.0 mm	.109"	2.8 mm	.125"	3.2 mm	.140"	3.6 mm	.188"	4.7 mm	.250"	6.3 mm
POUCES		LB/FT LB/PI	kg/m	LB/FT LB/PI	kg/m	LB/FT LB/PI	kg/m	LB/FT LB/PI	kg/m	LB/FT LB/PI	kg/m	LB/FT LB/PI	kg/m
1½	38	1.3	2.0			2.2	3.3						
2	50	1.8	2.6			2.9	4.3						
2½	64	2.2	3.3			3.7	5.5						
3	76	2.6	3.9			4.2	6.3						
4	102	3.5	5.2			5.6	8.4						
5	127	4.4	6.5			7.0	10.4						
6	152	5.2	7.8			8.4	12.5						
8	203	7.1	10.6			11.2	16.8						
10	254			12.2	18.2	14.0	21.0						
12	305			14.7	21.9	16.8	25.0						
14	356					19.6	29.2	21.8	31.5				
16	406					22.2	33.1	25.0	37.3	35.6	53.2		
18	457					24.8	37.0	28.1	41.9	38.0	56.6		
20	508							31.3	46.7	42.3	63.0	58.0	86.5
24	610									50.0	74.0	69.6	103.9
30	762									68.5	102.1	84.0	125.3
36	914									77.0	114.8	106.0	158.0

**NOTES**

1. Wall thickness tolerance to ASTM A 778.
2. Material: Stainless steel 304L - 316L - 317L.  
Other alloys available upon request.
3. For maximum working pressure see technical section.
4. Diameters & thicknesses other than shown available on request.