


10K / Class 150 Swing Check Valve

Pressure-Temperature Rating: JIS B2238 · ASME B16.34

10UOA(T)* / 150UOA
10UOAM(T)* / 150UOAM



Disc type 2½" and smaller

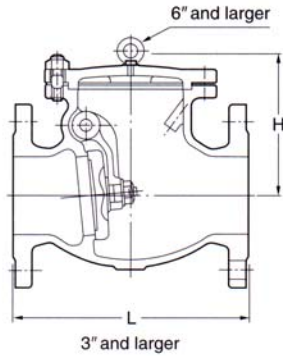

Parts	10UOA(T)*	10UOAM(T)*	150UOA	150UOAM
Body	SCS13A	SCS14A	CF8	CF8M
Cover	SCS13A	SCS14A	CF8	CF8M
Disc	SCS13A	SCS14A	CF8	CF8M
Disc nut*	SUS304	SUS316	304	316
Gasket	Refer to Page 6			
Hinge pin	SUS304	SUS316	304	316
Plug	SUS304	SUS316	304	316
Arm	SCS13A	SCS14A	CF8	CF8M
Washer*	SUS316, SUS316L (3"~6")		316, 316L (3"~6")	
Cover bolt/nut	SUS304/304		B8/8	
Split pin*	SUS316L		316L	

* (T) Suffixing stands for the provision of ceramic filled PTFE gaskets.

* For 3" and larger.

Note : Body seats and/or disc seats can be optionally hard-faced.

Face-to-Face Dimensions: JIS B2002 · ASME B16.10
End Flange Dimensions: JIS B2238 · ASME B16.5
Wall Thickness: ASME B16.34

Size	in.	1½	2	2½	3	4	5	6	8	10	12	14	16	18	20	24
	mm	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L	in.	6.50	8.00	8.50	9.50	11.50	13.00	14.00	19.50	24.50	27.50	31.00	34.00	38.50	38.50	51.00
	mm	165	203	216	241	292	330	356	495	622	698	787	864	978	978	1295
H	in.	4.2	4.7	5.3	5.8	6.7	7.5	8.4	9.96	11.0	12.3	14.3	16.1	18.7	19.9	23.4
	mm	107	120	135	147	169	190	213	253	279	312	364	410	475	505	595