


200# WOG STAINLESS STEEL GLOBE VALVE



FIG. T2GL

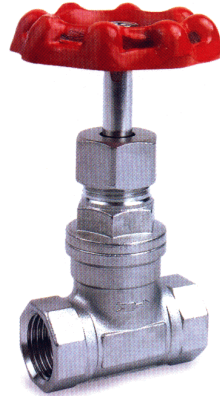

Ends: ANSI B1. 20.1 NPT
 Size range: 1/4" to 2"
 Pressure 1/4" to 2": 200 psi (WOG)
 Max. Temperature: 350 °F
 Swivel Disc, Integral Seat
 Full Port
 Inspection & Testing: API 598

Materials:

No.	Part Name	Specification
1	Body	ASTM A351-CF8M
2	Bonnet	ASTM A351-CF8M
3	Disc	ASTM A351-CF8M
4	Stem	AISI 316
5	Stem Washer	AISI 316
6	Packing	PTFE
7	Sleeve	AISI 316
8	Packing Nut	ASTM A351-CF8M
9	Gasket	PTFE
10	Handwheel	Aluminum
11	Name Plate	Aluminum
12	Handwheel Nut	AISI 304

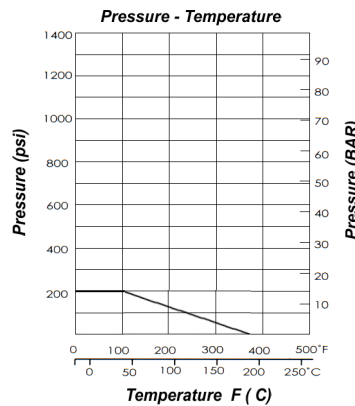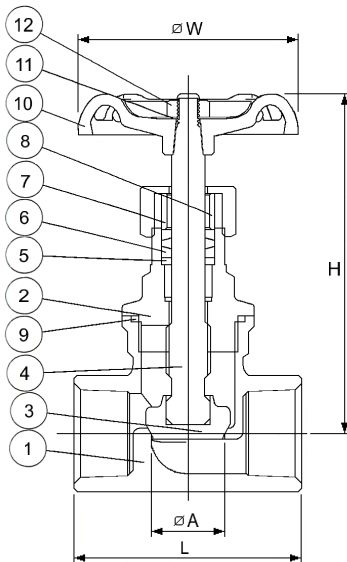

Dimensions:

Size		$\varnothing A$		L		$\varnothing W$		H Open		CV	Weights	
in	mm	in	mm	in	mm	in	mm	in	mm		lb	kg
1/4"	8	.39	10	2.05	52	2.44	61	3.94	100	1.9	.88	.4
3/8"	10	.47	12	2.05	52	2.44	61	3.94	100	2.8	.84	.38
1/2"	15	.59	15	2.05	52	2.44	61	3.94	100	4.6	.78	.36
3/4"	20	.79	20	2.36	60	3.03	77	4.33	110	8.6	1.1	.5
1"	25	.98	25	2.83	72	3.03	77	4.72	120	13.9	1.47	.67
1 1/4"	32	1.26	32	3.15	80	3.27	83	5.91	150	23.3	2.13	.97
1 1/2"	40	1.57	40	3.54	90	4.13	105	6.3	160	37.6	2.79	1.27
2"	50	1.97	50	4.17	106	4.13	105	7.09	180	61.5	4.18	1.9