
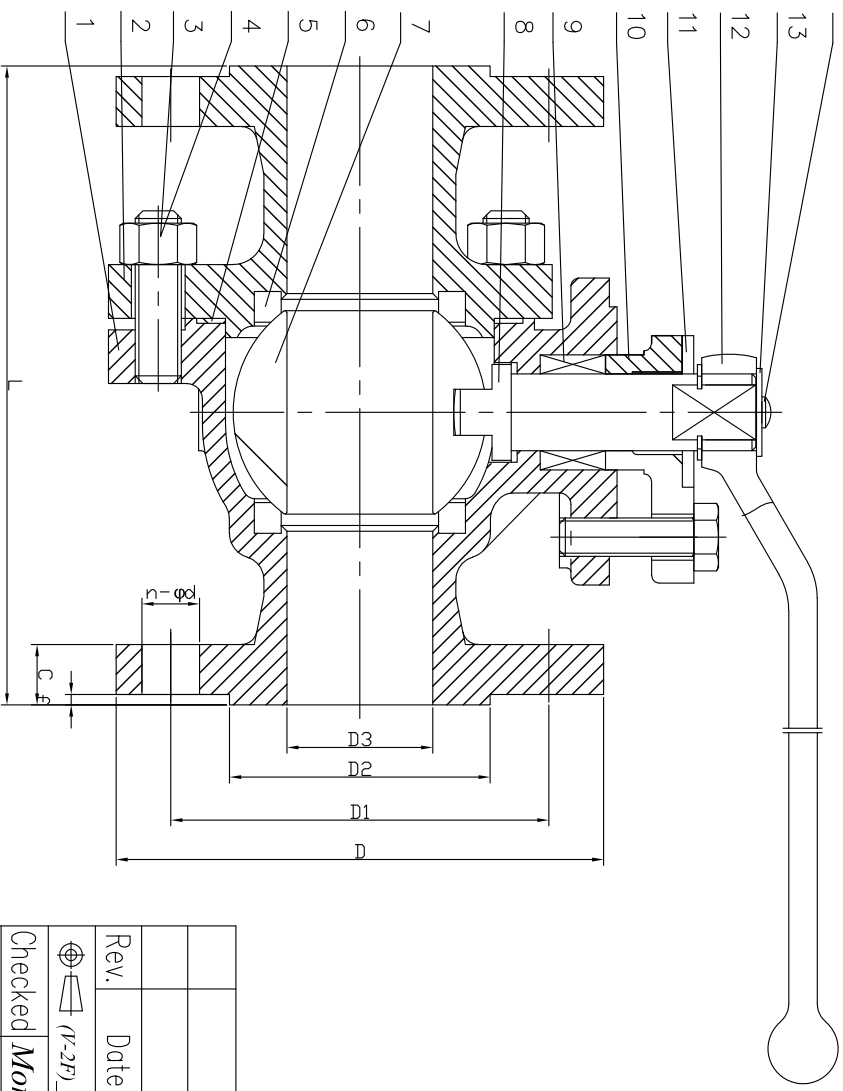


MAIN PARAMETER SPECIFICATION

- 1 Design and manufacture: API 6D
- 2 Face to face : ANSI B16.10
- 3 End flange Dimensions : ANSI B16.5
- 4 Pressure-Temp : ASME B16.34
- 5 Pressure test : API 598

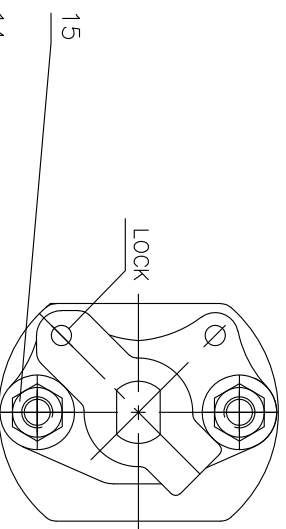

600	2"	292	165	127	92.1	49	32.4	7	4-φ19
	1"	216	125	88.9	50.8	25	24.5	7	8-φ19
Class	NPS	L	D	D1	D2	D3	C	f	n-φd

Specifications

Nominal pressure	CL600	Shell test	15.0MPa
Suitable temp	-29~80†	Seal test	11.0MPa
Suitable medium	W.D.G	Air seat test	0.6MPa

15	SCREW	ASTM A193 B8M
14	SCREW	SS304
13	WASHER	SS304
12	HANDLE	CARBON STEEL+Zn
11	STOP BLOCK	CARBON STEEL+Zn
10	GLAND	ASTM A351 CF8
9	PACKING	GRAPHITE
8	STEM	ASTM A182 F316
7	BALL	ASTM A182 F316
6	SEAT	DEVLON
5	GASKET	SS316+GRAPHITE
4	NUITS	ASTM A194 8M
3	BOLTS	ASTM A193 B8M
2	BONNET	ASTM A351 CF8M
1	BODY	ASTM A351 CF8M
NO.	Parts Name	Material

Rev.	Date	Description	Type	CL600	Rev. A
Checked	<i>Morris</i>	Scale	<i>Fii</i>	Date	2019/10/22
Drawn	<i>Charles</i>	Describe	<i>Split Body Full Bore Ball Valves</i>		



Rev.	Date	Description	Type	CL600	Rev. A
Checked	<i>Morris</i>	Scale	<i>Fii</i>	Date	2019/10/22
Drawn	<i>Charles</i>	Describe	<i>Split Body Full Bore Ball Valves</i>		